

TRANWOTM
Smart Wireless Video

GigaAirTM VMi120

Smart iCAM Remote HD Wi-Fi
DIY Surveillance Camera

Wi-Fi



Setup

- Quick & easy setup without using Ethernet cable or QR code
- Free Apps for iOS and Android OS

Video

- H.264 video compression
- RTSP/P2P dual streams
- HD 720P / VGA / QVGA resolution

Audio


- Two-way talk

Push Message Alert

- Motion detection
- Voice detection

System

- Temperature sensor
- Micro SD recording
- PTZ
- Still image capture
- Night vision

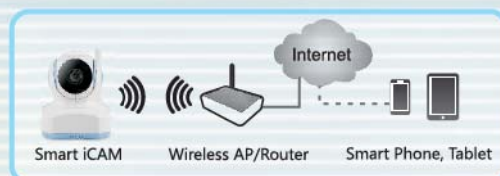

* iPhone, iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
* Google Play is a trademark of Google Inc.

www.tranwo.com

TRANWO Technology Corp.
No.236, Sec. 3, Huanbei Rd., Jubei City, Hsinchu County 30265, Taiwan
TEL: +886-3-553-5326 FAX: +886-3-553-5283
EMAIL: sales@tranwo.com www.tranwo.com



Use the *Smart iCAM* to find everything you most concern.

Specifications:

Wireless	Wireless standard	IEEE 802.11b/g/n	
	Frequency	2.4 GHz ISM band	
	Channel	14 channels	
	RF output power	11b >= 17 dBm	
		11g >= 14 dBm	
		11n >= 14 dBm	
Spread spectrum	DSSS		
Modulation	DBPSK, DQPSK, CCK and OFDM		
Video	Type	1/6" color CMOS	
	Effective pixel (H/V)	H: 1280 ; V: 720	
	Image resolution	720p(HD)	
	Lens focus	0.6m ~ ∞	
	View angle U/D/R/L(TYP)	17/17/21.5/21.5 deg	
	Video compression	H.264	
	Video streaming	H.264	
	Frame rate	up to 30fps in best condition	
	Auto white balance	Yes	
Audio	Audio input	Two-way audio with built-in MIC & Speaker	
	Sampling rate	8K, 16 bits or Speex 19Kbps(for P2P)	
	Sampling compression	G.711(RTSP), Speex(P2P)	
	Night vision	Light sensor	Yes
IR LED		8pcs, 850nm wavelength	
Night vision activation		6 Lux activation	
Night vision		Yes	
Day & Night		IR-Cut	
Software	iOS	Support iPhone, iPad	
	Android	Android 2.1 or up	
System	Security	WPA2-PSK(AES, TKIP), WPA-PSK(AES, TKIP), 128/64 bit WEP	
	Push message alert	Yes	
	Recording/Motion Recording	Support Micro SDHC Card, class 6 or above, up to 32GB	
	Motion Detection & Zone setting	Yes	
	Voice detection and pre-recorded audio playback	Yes	
	Temperature sensor	Yes	
	Video setting(resolution/bitrate/fps)	Yes	
	Pan and Tilt	Yes(H: 270deg, V: 120 deg)	
	Display resolution	HD(1280x720), VGA(640x480), QVGA(320X240)	
	Still image capture	Yes	
	Power supply	DC 5.9V, 2A	
	Dimension	85(W)x85(D)x106(H)mm	
	Operating temperature range	0°C~40°C(32°F~104°F)	
Operating humidity range	40~90%RH		

Specifications are subject to change without prior notice.



Home/Office



Kids



Seniors



Pets