

TRANWOTM
Smart Wireless Video

GigaAirTM VM2510

Portable-Camera

5" HD Baby Monitor



Image Resolution



LCD Screen Size



Safe Zone Setting



Night Vision



White Noise



Portable Monitor /
Camera



Two-way Talk



Digital Zoom



Voice Activation



Motorized Pan & Tilt



Long Battery Life



Lullaby



Temperature Sensor

FEATURES

Camera

- HD 720P CMOS sensor
- Invisible night vision
- Long standby time
- Motorized Pan/Tilt/Zoom

Monitor

- 5-inch HD 720P Screen
- Dual view
- Long standby time
- Voice activated video On/Off
- Temperature/Time display
- Virtual Boundary Safe Zone
- Sound level, VOX, Power indicator

Audio

- Two-way talk
- Comforting lullaby and with white noise
- Sound level indicator
- Adjustable volume for microphone /lullaby/talk-back

Alert

- Voice activation (VOX)
- Safe zone alert
- Low battery alert
- Out of range warning




www.tranwo.com

TRANWO Technology Corp.
No.236, Sec. 3, Huanbei Rd., Jubei City, Hsinchu County 30265, Taiwan
TEL: +886-3-553-5326 FAX: +886-3-553-5283
EMAIL: sales@tranwo.com www.tranwo.com

SPECIFICATIONS

CAMERA

Wireless	RF Frequency Range	2400MHz - 2483.5MHz for CE and FCC
	The Number of Channel	20 channels for CE and FCC
	First Channel Frequency	2408.86 MHz for CE and FCC
	Last Channel Frequency	2465.86 MHz for CE and FCC
	Distance, line of sight	>=300m
	S/W (RF Protocol)	Fix packet
Image	Type	Color CMOS
	Effective pixel (H/V)	H:1280, V:720
	Lens Focus	1.5m ~ ∞
	Image compression	H.264
	Image resolution	HD
	Field of View (Horizontal)	60 degree +/- 10%
	Field of View (Vertical)	33 degree +/- 10%
Audio	Auto White Balance	yes
	Two- way talk	yes
	Lullabies	yes
Night Vision	White noise	yes
	Light sensor	Yes
System	Day&night Activation	Yes
	Pan&tilt	manual
	Temperature sensor	yes
	Power supply	DC5V/2A USB typeC / Battery 3.7V
	Battery capability	2600mAh
	Operating temperature range	0~40degC
Operating humidity range	40~90% RH	

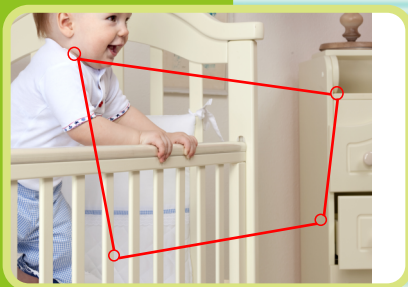

Safe Zone Virtual Boundary



Automatic Night Vision



3X Zoom



Expandable System

MONITOR

Wireless	Frequency	2400MHz-2483.5MHz
	Antenna	Dipole, external
Display	LCD Screen Size	5"
	Resolution	720*1280
	Display color	Full color
Alert	Danger Zone Alert	Yes
	Out of Range Alert	Yes
	Voice Activation (VOX)	Yes
	Low Battery Alert	Yes
System	Voice Activation (VOX) Indicator	Yes
	Audio only Mode	Yes
	Sound Level Indicator	Yes
	Low Battery Indicator	Yes
	Power Supply	DC5V/2A USB typeC
	Operation Temperature	0°C ~40°C (32°F ~104°F)
	Operating Humidity	40~90% RH
Battery Capability	2600mAh	