

VMi136

Smart Feeder and Monitoring Automatic Pet Feeder with Portable FHD Camera



Image Resolution



Two-way Talk



Motion Detection



Night Vision



Portable Charging



Wide View Angle



Pet Feeder



Feeding Schedule



Low food alert



LED Night light



Snap Shot



Live Sharing

FEATURES

Camera

- FHD 1080P
- H.264 video compression
- Automatic Day/Night viewing

Audio

- Two-way talk
- Echo cancellation

Alert

- Low Food alert
- Motion alert


Feeder

- Manual feeding
- LED for nightlight
- Washable, removable food tank and tray
- Built-in power charging for camera
- For Adult cat, small size & middle size dog

Remote Access

- Remote feeding and monitoring
- Schedule feeding time

DIAGRAM

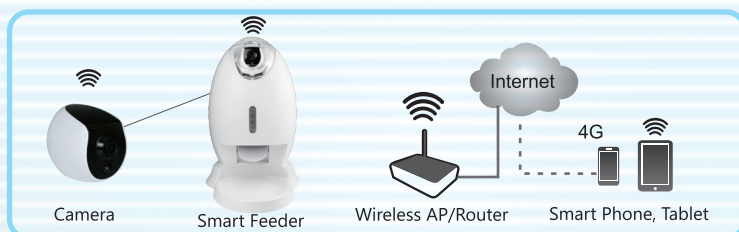

* iPhone, iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
* Google Play is a trademark of Google Inc.


VMi136

Smart Feeder and Monitoring Automatic Pet Feeder with Portable FHD Camera

SPECIFICATIONS

Wireless	WiFi Capable	Yes
	Frequency	2.4GHz ISM band
	Wireless Standard	IEEE 802.11n
	Transmission Distance	>= 15m indoor
Image	Image Sensor	Full HD image 1/2.7" CMOS sensor
	Effective Resolution (pixel)	1920 x 1080
	Video Compression	H.264
	Image Resolution	FHD 1080P
	Frame Rate	30 fps
	Lens Focus	1.5m ~ ∞
	Field of View (FoV)	D=144°, H=115°, V=87°
	Auto White Balance	Yes
Audio	Tow-way Talk	Built-in speaker and mic
	Audio Codec	With echo cancellation
Night Vision	Light Sensor	Built-in
	IR Cut Filter	Built-in
	IR LEDs	6 pcs, 850nm LED
	Night Vision Range	up to 3 meters distance
Recording	Storage & Review	Micro SD card
	Video Streaming	P2P / Relay server auto detection for better video quality
System	Motion Detection	PIR trigger base, supporting instant notification
	LED indicator	. Low battery power (Blinking Red), Full power (Red off)
		. APP connection (Blue)
		. Wireless AP linking (Blinking Yellow)
	Battery Capability	2200mAh rechargeable Li-ion battery
	Battery Life	2 months
	Power Charging	USB 2.0 with external USB cable for charging
	Operation Temperature	0°C ~40°C (32°F ~104°F)
	Operating Humidity	40~90% RH
	Dimension	W63 x H65 x D86
Remote Access	Weight	2281g
	Snap Shot	1080P/720P/480P
	iOS iPhone/iPad	10.0 or later
	Android	5.0 or later

Pet Monitoring

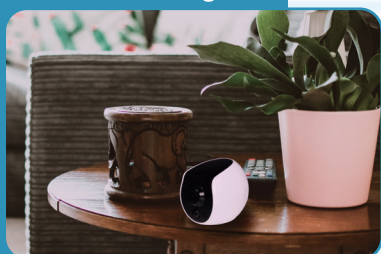

Easy Monitoring

